



A Donaldson Company

A WORLD LEADER IN FUME EXTRACTION TECHNOLOGY

V 300E

ELECTRONICS

Last Updated on 28.08.2018



Entry level dual arm fume extraction system for electronics hand soldering processes.

The V 300E extraction unit is a compact, low cost system which is capable of generating high air flow rates from a range of bench top attachments.

The extraction unit can be positioned comfortably under a bench with a simple installation kit to connect to the most suitable extraction accessory.

Technology



HEPA filter



Advanced carbon filter technology



ProTECT service plan



SureCHECK quality standard

Key features of the V300E

Simple Installation
Standard

Granulated carbon gas filter (ACF) technology
Standard

2 x 75mm x 1m 'Stay Put' hose kit
Optional

High air flow rates
Standard

HEPA/Gas Combined filter (99.997% @ 0.3 microns)
Standard

2 x 75mm 'Stay Put' hose with table mount kit
Optional


Contact BOFA at <https://bofainternational.com/en/contact/>

<https://bofainternational.com/en/portal/datasheets/v300e/>





Technical specification

- 1. Power cable inlet
- 2. On / off switch
- 3. Filter latch
- 4. Hose inlet connection - 2 x 75mm
- 5. Exhaust outlet
- 6. Motor cooling inlet

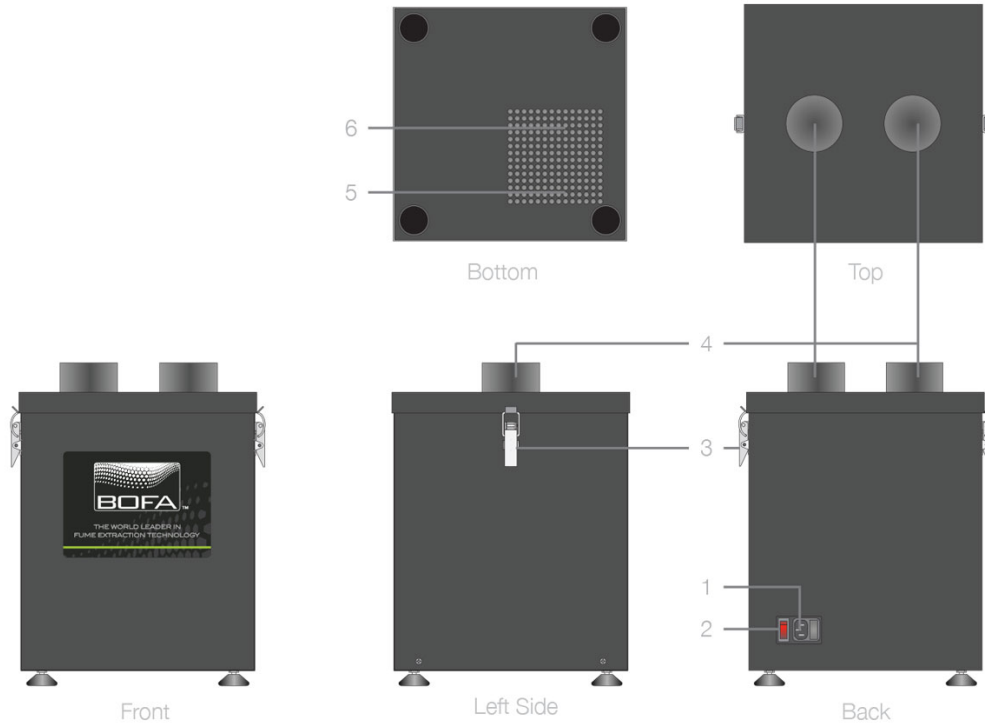

Airflow through filters

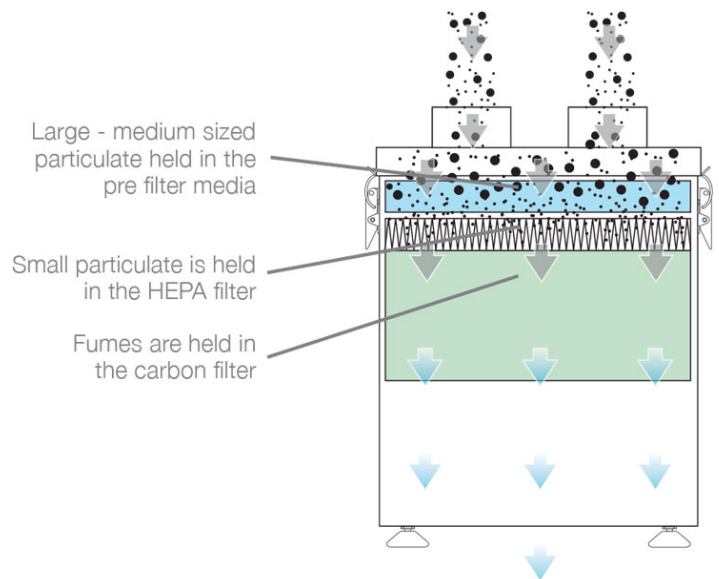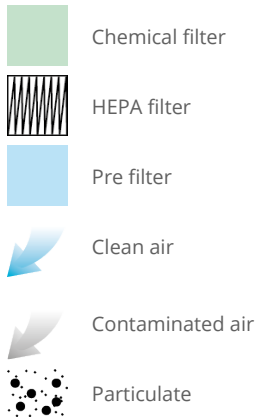

Technical data

	EU	US
Dimensions (HxWxD)	450 x 330 x 310mm	17.72 x 13.00 x 12.21"
Cabinet construction	Powder coated mild steel	Powder coated mild steel
Airflow / Pressure	320m ³ /hr / 5mbar	188cfm / 5mbar

Technical data

Electrical data	230v 50/60Hz	115v 50/60Hz
	Full load current: 1.1 amps / 0.25kw	Full load current: 2.1 amps / 0.255kw
Noise level	<52dBa (at typical operating speed)	<52dBa (at typical operating speed)1
Weight	15kg	33lbs
Duct size	2 x 75mm	2 x 3"
Max duct run	3mtrs	9.8ft
Gas filter	Treated activated carbon	Treated activated carbon
Approvals	CE	CE

Pre filter specifications

Filter media	Synthetic pad
Filter media construction	Pad
Filter efficiency	G4

Combined filter specifications

Filter media	Glass fibre
Media construction	Maxi pleat construction with webbing spacers
Filter efficiency - H14 HEPA	99.997% @ 0.3 microns
Treated activated carbon	1.65kgs (3.63 lbs)
Filter housing	Zintec mild steel

Unit Specifications


	EU	US
Maximum number of 75mm arms, cowls or down draft trays	2	2

Unit part numbers

Model	Description	Voltage	Part number
V 300E Powder coated	Unit only (no install kit)	230v	E0942A0000
V 300E Powder coated	2 x unit mounted 75mm diameter x 1m long stay-put arms with funnels	230v	E0942A0001

Replacement filter part numbers

Description	Part numbers
Pre filter (Pack of 5)	A1030108
HEPA / Gas combined filter	A1030266

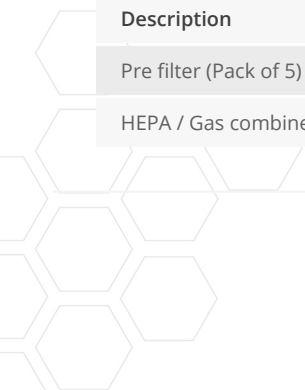

Arm accessories



Hose kits and replacement arm part numbers

Number reference	Description	Part number
1	75mm diameter stay-put arm with funnel 1m long	A1020042
2	Table bracket	A1020077
3	1.5m of 75mm flex with jubilee clip	A1020425

Datasheet correct at time of publishing.

The carbon used in BOFA units is capable of removing a wide range of VOC's, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

Think before you print! Please consider the environment before printing this document.

